



ABSHDD-20 - 20-Part Hydraulic Dough Divider



MARKETING SPECIFICATION

Specified Dough Divider shall be an ABSHDD-20 with solid welded steel frame and stainless steel body panels, heavy duty cast aluminum bowl and spring assisted locking bowl cover, finished in NSF epoxy paint. ABSHDD-20 Teflon-Coated cutting head shall divide 35 pounds maximum dough weight into 20 even dough sections. Unit shall utilize fully-enclosed, low-noise hydraulic system with hand-operated valve to automatically control degassing and cutting. Heavy duty motor and pump with sanitary separation panel between cutting head and pump for easy cleaning. Equipped with Stainless-Steel knives and quick change individual dividing head segments, four locking casters, and ETL/UL and ETLS/NSF Listing, meeting both UL 763 and NSF Standard 8.



Meets UL 763 and NSF-8 Standards





20-Part Hydraulic Dough Divider

ABSHDD-20



HDD-20S CAPACITIES

20-DIVISIONS

16 kg or 35 Lbs Dough

PIECE SIZES

100—800 grams
Or
3.5—28 ounces

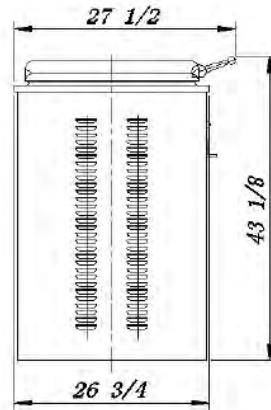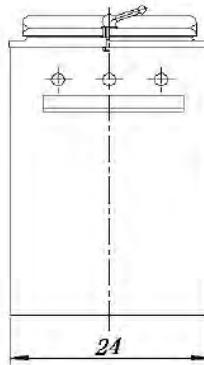

HDD-20R CAPACITIES

20-DIVISIONS

16 kg or 35 Lbs Dough

PIECE SIZES

100—800 grams
Or
3.5—28 ounces

MODEL ABSHDD-20 UTILITY SPECIFICATIONS

Model ABSHDD-20	208-220/60/3
Plug	NEMA L15-20P Plug
Slow-Blow Breaker	15 Amp
Motor kW	1.5 kW

MODEL ABSHDD-20 CAPACITIES

Model	Divisions	Min Weight	Max Weight	Dough Weight
HD20	20	3.5 oz	28.2 oz	35 lbs

SHIPPING

Model	Crated Dimensions Height x Width x Depth	Unit Dimensions Height x Width x Depth	Weight	Net Weight	Freight Class	Door Clearance	Fork Lift Delivery Recommended
ABSHDD-20	50" x 35" x 29"	42" x 23" x 26"	890	780	85	36"	Yes