



ABSHDD-24 - 24-Part Hydraulic Dough Divider



MARKETING SPECIFICATION

Specified Dough Divider shall be an ABSHDD-24 with solid welded steel frame and stainless steel body panels, heavy duty cast aluminum bowl and spring assisted locking bowl cover, finished in NSF epoxy paint. ABSHDD-24 Teflon-Coated cutting head shall divide 35 pounds maximum dough weight into 24 even dough sections. Unit shall utilize fully-enclosed, low-noise hydraulic system with hand-operated valve to automatically control degassing and cutting. Heavy duty motor and pump with sanitary separation panel between cutting head and pump for easy cleaning. Equipped with Stainless-Steel knives and quick change individual dividing head segments, four locking casters, and ETL/UL and ETLS/NSF Listing, meeting both UL 763 and NSF Standard 8.



Meets UL 763 and NSF-8 Standards





Round Bowl Hydraulic Dough Divider

ABSHDD-24



HDD-24

24-DIVISIONS

Max Dough:
16 kg or 45 Lbs Dough

PIECE SIZES

200 g—850 grams
Or
7.0—30 ounces

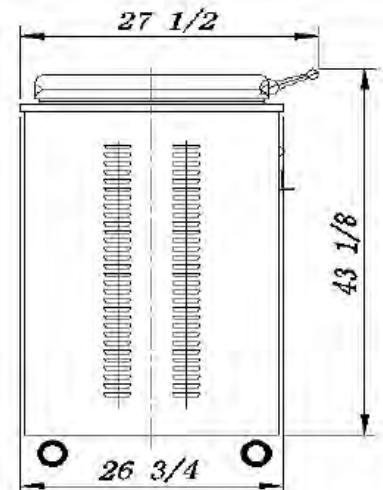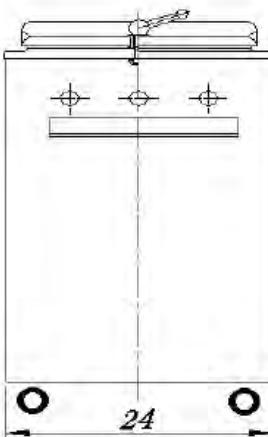

MODEL ABSHDD-24 UTILITY SPECIFICATIONS

Model ABSHDD-24	208-220/60/3
Plug	NEMA L15-20P Plug
Slow-Blow Breaker	15 Amp
Motor kW	1.5 kW

MODEL ABSHDD-24 CAPACITIES

Model	Divisions	Min Weight	Max Weight	Dough Weight
HD24	24	5.3 oz	31.7 oz	47.6 lbs

SHIPPING

Model	Crated Dimensions Height x Width x Depth	Unit Dimensions Height x Width x Depth	Weight	Net Weight	Freight Class	Door Clearance	Fork Lift Delivery Recommended
ABSHDD-24	50" x 35" x 29"	43-1/8" x 24" x 27- 1/2"	890	780	85	36"	Yes