



ABSMRO-2G - DOUBLE-RACK ROTARY OVEN, GAS



MARKETING SPECIFICATIONS

Specified oven shall be an American Baking Systems Model ABSMRO-2E, Electrically Heated Rotating Double Rack or Two Single Rack Capacity Oven, with Energy Efficient 275,000 BTU Triple Pass Heat Exchanger, Heavy-Duty Three section Water Drop Steam System and rated for Zero Clearance from Combustible Side and Back Walls. Oven shall be equipped with Heavy-Duty "B" lift Rack System or Turntable Platform, Digital or Manual controls, Fully Integrated Canopy Hood with Timed Exhaust Fan, Electric Steam Damper; Oven shall be ETL listed and Conforms to ANSI UL STD. Z83.11 & NSF/ANSI STD. 4 Certified To CSA STD. 1.8.

MODEL ABSMRO-2G - DOUBLE-RACK ROTARY OVEN, GAS

STANDARD FEATURES

- Heavy-Duty Stainless Steel Interior and Exterior
- Fully-Welded Highly Efficient Stainless Steel Counterflow Heat Exchanger
- Fully Insulated with High Temp Insulation
- Heavy-Duty Automatic "B" Lift System or Turntable Platform with Damage Free Safety Clutch
- Fully Locking Heavy-Duty Door with View Window
- Oven Delivered in One Piece for Quick and Simple Installation
- Oven Supplied with Fully Integrated Hood and Timed Extraction Fan
- High Volume Three Zone Water Drop Steam System
- Electrically Controlled Steam Damper
- Single Electrical Connection 208/220 volts, 3 ph 60 Hz
- Steam: $\frac{1}{2}$ " Cold Water Line - 30 to 60 PSI

CONTROL AND PERFORMANCE FEATURES

- Manual or Digital Controls Available
- Automatic Heavy Duty Rack Lift System
- Industrial Style Turntable Available -Replaces "B" Lift
- Operating Temperatures up to 525 Degrees F
- High Efficiency 275,000 BTU Heat Exchanger—Fast Recovery
- Powered Vapor Hood with Timed Extraction Fan- Saves Energy

OPTIONS AND ACCESSORIES

- Heavy-Duty Stainless Steel Oven Racks

STANDARD PRODUCT WARRANTY

- One Year Parts and Labor (Contiguous USA and Canada Mainland)



Conforms to ANSI UL STD. Z83.11 & NSF/
ANSI STD. 4 Certified To CSA STD. 1.8.





AMERICAN BAKING SYSTEMS, INC.
290 LEGION COURT S.W. CEDAR RAPIDS, IA 52404 Phone:
319-373-5006 Fax: 319-373-5008
Email: INFO@ABS1.NET WEB: www.abs1.net



Double-Rack Rotary Oven, Gas

ABSMRO-2G

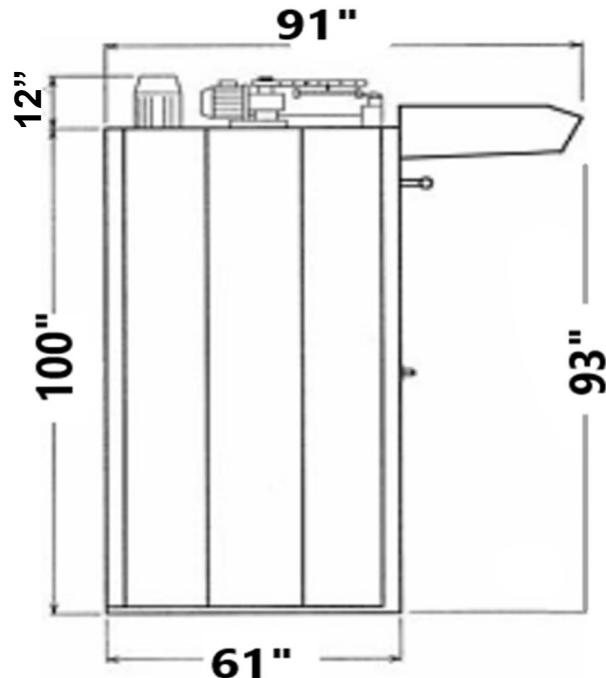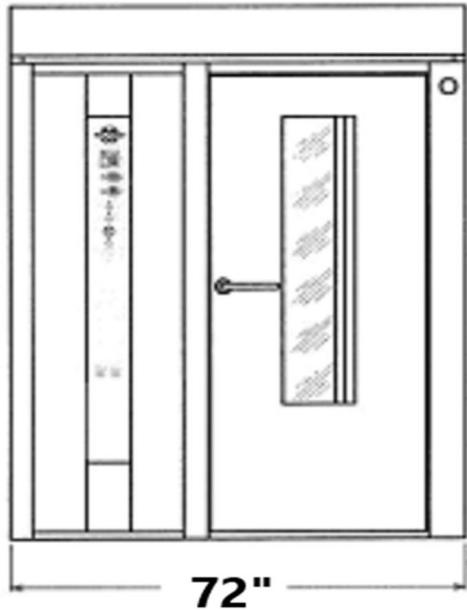

Dimensions shown with standard canopy.

MODEL ABSMRO-2G UTILITY SPECIFICATIONS	
Power Rating	275,000 BTU gas burner 3 kW Electrical
Supply Voltage	208-220/60/3 other voltages available on request
Plug	Hard Wired
Current Rating @ 208v	12 Amps
Water Pressure	30-60 PSI Maximum
Water Condition	Softened, Filtered

ABSMRO-2G CAPACITIES		
Product	Standard Bread 22-34 oz	160 loaves/bake (20 x B05)
	Rolls 2.1 oz (6 x 5 / tray)	90 dozen/bake
	Baguettes 18 oz 9 (5 fluted trays)	180 /bake
	Pies (foil)	57 dozen/bake

SHIPPING							
Model	Crated Dimensions Height x Width x Depth	Unit Dimensions Height x Width x Depth	Weight	Net Weight	Freight Class	Door Clearance	Fork Lift Delivery Recommended
ABSMRO-2G	99" x 75" x 65"	110" x 72.5" x 61"	2910	2866	110	Verify path from loading dock to install location.	Yes

ABSMRO-2G ships in one piece